

AB176M

Audio Player Microcontroller

Versions: 0.0.1

2025.7.11



Declaration

Copyright © 2025, www.bluetrum.com.

All Rights Reserved. No Unauthorized Distribution.

Bluetrum reserves the right to make changes without further notice to any products herein to improve reliability, function or design.

For further information on the technology, product and business term, please contact Bluetrum Company.

For sales or technical support, please send email to the address:

Sales: sales@bluetrum.com

Technical: project@bluetrum.com

Revision History

Date	Version	Comments	Revised by
2025-07-11	0.0.1	First draft	Leo

Table of Contents

TABLE OF CONTENTS	2
1 PRODUCT FEATURES.....	3
2 BLOCK DIAGRAM.....	4
3 PACKAGE DEFINITION.....	5
3.1 PIN ASSIGNMENT	5
3.2 PIN DESCRIPTIONS	5
4 CHARACTERISTICS.....	8
4.1 PMU PARAMETERS	8
4.2 IO PARAMETERS	8
4.3 AUDIO DAC PARAMETERS.....	9
4.4 AUDIO ADC PARAMETERS.....	10
4.5 POWER CONSUMPTION PARAMETERS.....	10
5 PACKAGE INFORMATION.....	11

1 Product Features

CPU and Flexible IO

- High performance 32bit RISC-V processor Core with DSP instruction
- Typical 128MHz operating frequency
- Internal 28KB RAM for data and program
- Program memory: SiP 1Mbit flash
- Flexible GPIO pins with Programmable pull-up and pull-down resistors
- Support GPIO wakeup or interrupt

Audio Interface

- MIC amplifier x1
- High performance 16bits/24bits Sigma-Delta ADC x1:
 - SNR: 97dB
 - Sample rate: 8KHz /12KHz /16KHz /24KHz /32KHz /48KHz /96KHz
- High performance 16bits/24bits Sigma-Delta DAC x2:
 - SNR @Single mode: 98dB
 - SNR @VCMBUF mode: 100dB
 - Sample rate: 4KHz /6KHz /8KHz /11.025KHz /12KHz /16KHz /22.05KHz /24KHz /32KHz /38KHz /44.1KHz /48KHz /64KHz /76KHz /88.2KHz /96KHz
- Audio DAC support single-ended and VCMBUF mode
- Support flexible audio EQ adjust
- Support analog line-in
- Supports insertion and removal detection for 4-segment headphones, 3-segment headphones

Peripheral and Interfaces

- Watch Dog
- Frequency detector
- Master/Slave SPI x2
- Normal UART x2; High speed UART with CTS/RTS x1
- Full speed USB1.1 Host/Device controller x1
- 32-bit normal timer x 2; multi-function 32-bit timer x 2
- 10-bit SAR ADC x8ch
- Crossbar Input/Output
- Built in PMU, capless LDOs and LDO
- 8 Individually programmable and multiplexed GPIO pin

Applications

- Type-C Wired Headphones

Package

- QFN20 3*3

Temperature

- Operating temperature: -40°C to +85°C
- Storage temperature: -65°C to +150°C

SoC Architecture

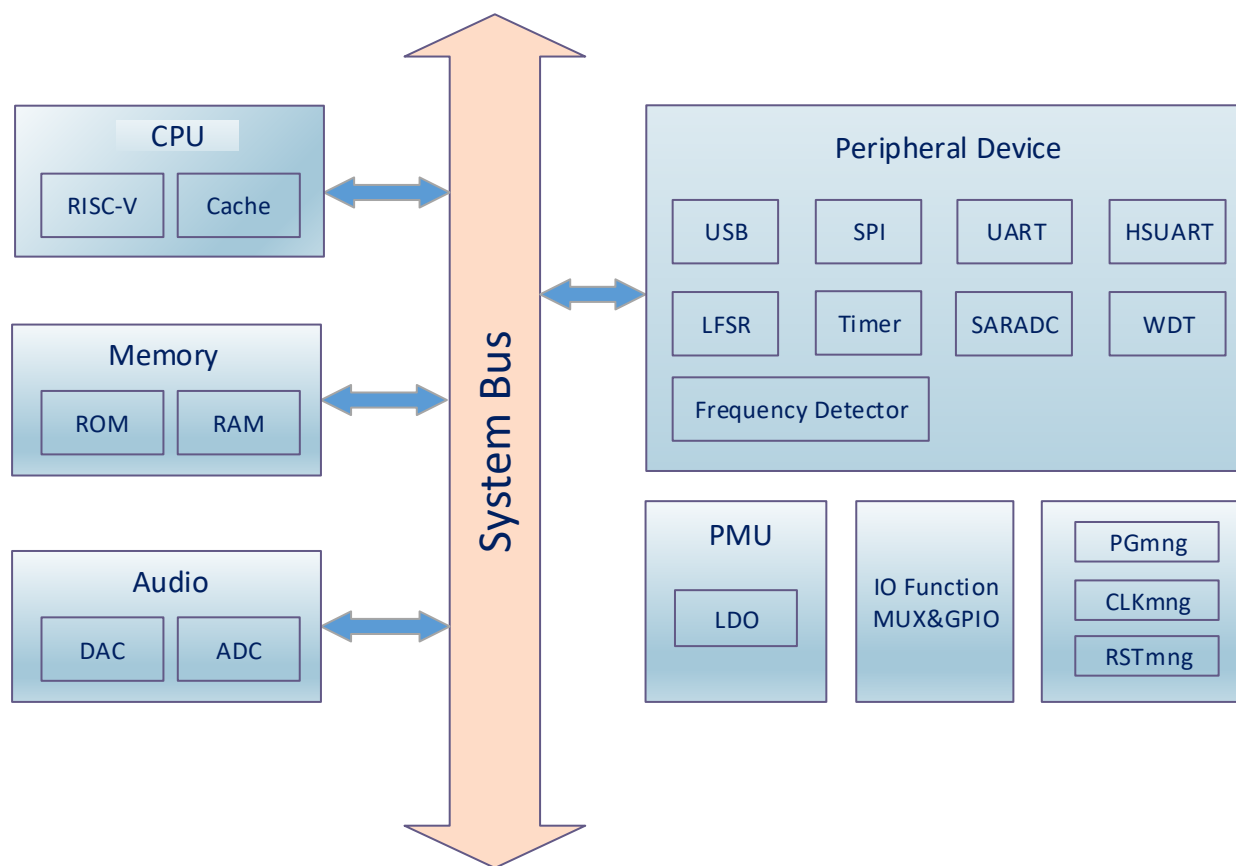


Figure 2-1 Architecture Block Diagram

3 Package Definition

3.1 Pin Assignment

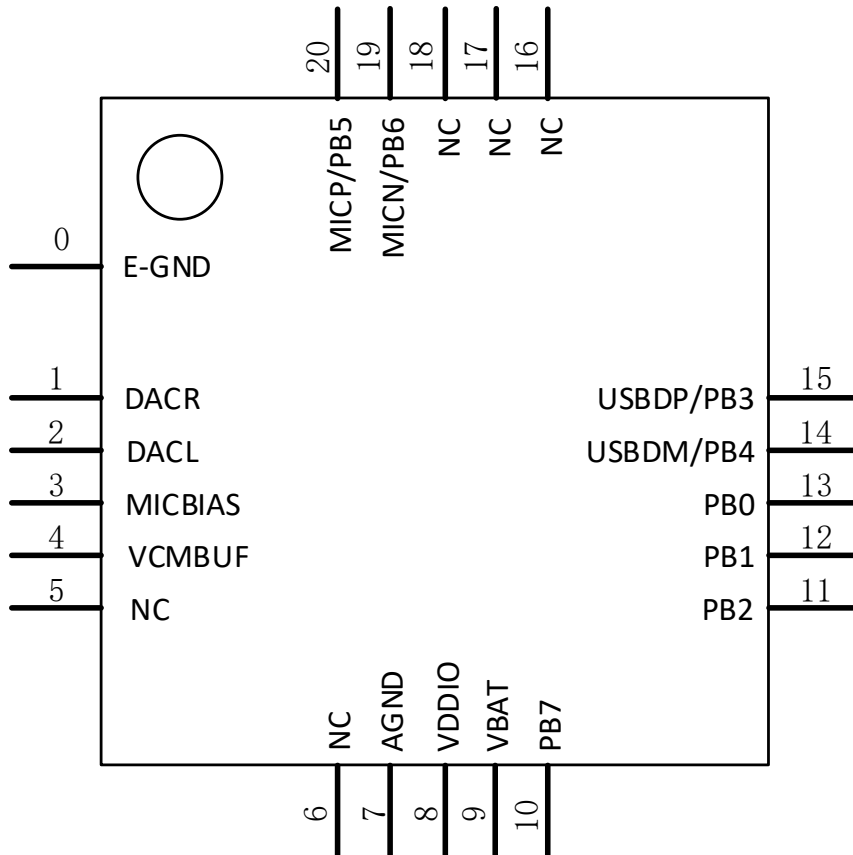


Figure 3-1 Pin Assignment for QFN20

3.2 Pin Descriptions

Table 3-1 QFN20 Pin Description

Pin No.	Name	Type	Drive (mA)	Function
0	E-GND	GND	/	E-pad Ground
1	DACR	A	/	DAC right channel output
2	DACL	A	/	DAC left channel output
3	MICBIAS	A	/	Microphone Bias
4	VCMBUF	A	/	VCM buffer output
5	NC	-	-	-

6	NC	-	-	-
7	AGND	GND	/	DAC Ground
8	VDDIO	PWR	/	VDDIO power output
9	VBAT	PWR	/	VBAT power input
10	PB7	I/O	8/32	ADC7 SPI1_CLK/DO/DI-G8 TX0/RX0-G8 TX1/RX1-G8 HSTRX/CTS/RTS-G8 FMOSC-G8 PWM0/1/2-G8 T2CPT/T3CPT-G8 INT7 PB7
11	PB2	I/O	8/32	ADC2 SPI1_CLK/DO/DI-G3 TX0/RX0-G3 TX1/RX1-G3 HSTRX/CTS/RTS-G3 FMOSC-G3 PWM0/1/2-G3 T2CPT/T3CPT-G3 INT2 PB2
12	PB1	I/O	8/32	ADC1 SPI1_CLK/DO/DI-G2 TX0/RX0-G2 TX1/RX1-G2 HSTRX/CTS/RTS-G2 FMOSC-G2 PWM0/1/2-G2 T2CPT/T3CPT-G2 INT1 PB1
13	PB0	I/O	8/32	ADC0 SPI1_CLK/DO/DI-G1 TX0/RX0-G1 TX1/RX1-G1 HSTRX/CTS/RTS-G1 FMOSC-G1 PWM0/1/2-G1 T2CPT/T3CPT-G1 INT0 PB0
14	PB4/USBDM	I/O	8/32	USBDM ADC4 SPI1_CLK/DO/DI-G5 TX0/RX0-G5 TX1/RX1-G5 HSTRX/CTS/RTS-G5 FMOSC-G5 PWM0/1/2-G5 T2CPT/T3CPT-G5 INT4 PB4
15	PB3/USBDP	I/O	8/32	USBDP ADC3 SPI1_CLK/DO/DI-G4

				TX0/RX0-G4 TX1/RX1-G4 HSTRX/CTS/RTS-G4 FMOSC-G4 PWM0/1/2-G4 T2CPT/T3CPT-G4 INT3 PB3
16	NC	-	-	-
17	NC	-	-	-
18	NC	-	-	-
19	PB6/MICN	I/O	8/32	MICN ADC6 SPI1_CLK/DO/DI-G7 TX0/RX0-G7 TX1/RX1-G7 HSTRX/CTS/RTS-G7 FMOSC-G7 PWM0/1/2-G7 T2CPT/T3CPT-G7 INT6 PB6
20	PB5/MICP	I/O	8/32	MICP ADC5 SPI1_CLK/DO/DI-G6 TX0/RX0-G6 TX1/RX1-G6 HSTRX/CTS/RTS-G6 FMOSC-G6 PWM0/1/2-G6 T2CPT/T3CPT-G6 INT5 PB5

Note: I/O: Digital input/output; I : Digital input; A : Analog Pin; PWR: Power Pin; GND: Ground.

4 Characteristics

4.1 PMU Parameters

Table 4-1 PMU voltage input Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VBAT	Voltage input	2.3	3.7	5.5	V	

Table 4-2 VDDIO LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDIO	3.3V LDO voltage output	1.5	3.3	3.6	V	Light Loading condition
ΔV VDDIO	Output Mismatch 1-sigma	-	11	-	mV	VDDIO=3.3v
ILOAD	Maximum output current	-	-	70	mA	@VBAT=3.6v
ISC	Short Circuit Current Limit	-	150	230	mA	@VBAT=3.8v

Table 4-3 AVDD LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
AVDD	3.3V LDO voltage output	1.5	3.3	3.6	V	Light Loading condition
ΔV AVDD	Output Mismatch 1-sigma	-	10	-	mV	AVDD=3.3v
ILOAD	Maximum output current	-	-	150	mA	@VBAT=3.6v
ISC	Short Circuit Current Limit	-	100	150	mA	@VBAT=3.8v

Table 4-4 VDDCORE LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDCORE	0.8V LDO voltage output	0.825	1.2	1.6	V	Light Loading condition
ΔV VDDCORE	Output Mismatch 1-sigma	-	6	-	mV	VDDCORE=1.1v
ILOAD	Maximum output current	-	-	30	mA	@VBAT=3.6v
ISC	Short Circuit Current Limit	-	-	680	mA	@VBAT=3.8v

4.2 IO Parameters

Table 4-3 I/O Parameters

GPIO—Electrical Characteristics							
Symbol	Description	Related GPIO	Min	Typical	Max	Units	Conditions
VIL	Low-level input voltage		-0.3		0.93	V	VDDIO=3.3V
VIH	High-level input voltage		2.31		3.6	V	VDDIO=3.3V
Driver Ability 1	Output Driver Ability 1			32		mA	VDDIO=3.3V

GPIO—Electrical Characteristics							
Driver Ability 0	Output Driver Ability 0			8		mA	VDDIO=3.3V
RPUP0	Internal pull-up resistor 0		0.24	0.3	0.36	K Ω	
RPUP1	Internal pull-up resistor 1		8	10	12	K Ω	
RPUP2	Internal pull-up resistor 2		160	200	240	K Ω	
RPDN0	Internal pull-down resistor 0		0.24	0.3	0.36	K Ω	
RPDN1	Internal pull-down resistor 1		8	10	12	K Ω	
RPDN2	Internal pull-down resistor 2		160	200	240	K Ω	

Table 4-4 Internal Resistor Characteristics

Port	General Output	High Drive	Internal Pull-Up Resistor	Internal Pull-Down Resistor	Comment
PB0-PB7 PG1,PG2,PG4,PG5	8mA	32mA	0.3K/10K/200K	0.3K/10K/200K	Internal pull-up/pull-down resistance accuracy $\pm$ 20%

4.3 Audio DAC Parameters

Table 4-5 Audio DAC Single Mode @VCM=1.25V

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
SNR		-	98.1	-	dB	with A-wt filter Output -2.75dBV with 32R 47uF loading Fin=1KHz
THD+N		-	-75.2	-	dB	with A-wt filter Output -2.75dBV with 32R 47uF loading Fin=1KHz
Output Range	Maximum output voltage	-	-2.75	-	dBV	with 32R 47uF loading

Table 4-6 Audio DAC VCMBUF Mode @VCM=1.25V

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
SNR		-	99.9	-	dB	With A-wt filter Output -2.33dBV with 32R loading Fin=1KHz
THD+N		-	-79.5	-	dB	With A-wt filter Output -2.33dBV with 32R loading Fin=1KHz
Output Range	Maximum output voltage	-	-2.33	-	dBV	With 32R loading

4.4 Audio ADC Parameters

Table 4-7 Audio ADC Parameters

Mode	Sym	Characteristics	Min	Typ	Max	Unit	Conditions
Differential input ADC Mode	SNR		-	97	-	dB	With A-wt filter Input -2dBV @ Fin=1KHz Gain = 6dB
	THD+N		-	-80	-	dB	
	Input Range	Maximum input voltage	-	-2	-	dBV	
Single input External-RC ADC mode	Gain		0	-	6	dB	0dB / 6dB
	SNR		-	89	-	dB	With A-wt filter Input -12dBV @ Fin=1KHz Gain=12dB
	THD+N		-	-58	-	dB	
	Input Range	Maximum input voltage	-	-12	-	dBV	
Internal-RC ADC mode	SNR		-	88	-	dB	With A-wt filter Input -13dBV @ Fin=1KHz Gain=6dB
	THD+N		-	-49	-	dB	
	Input Range	Maximum input voltage	-	-13	-	dBV	


4.5 Power Consumption Parameters

Table 4-8 Current Parameters

State	Min	Typ	Max	Unit	Conditions
Idle		8		mA	With 32Ω loading
Play music		9.5		mA	
Call/Record		17.1		mA	
USB Suspend		2.24		mA	

5 Package Information

QFN3X3-20L(P0.4T0.75)

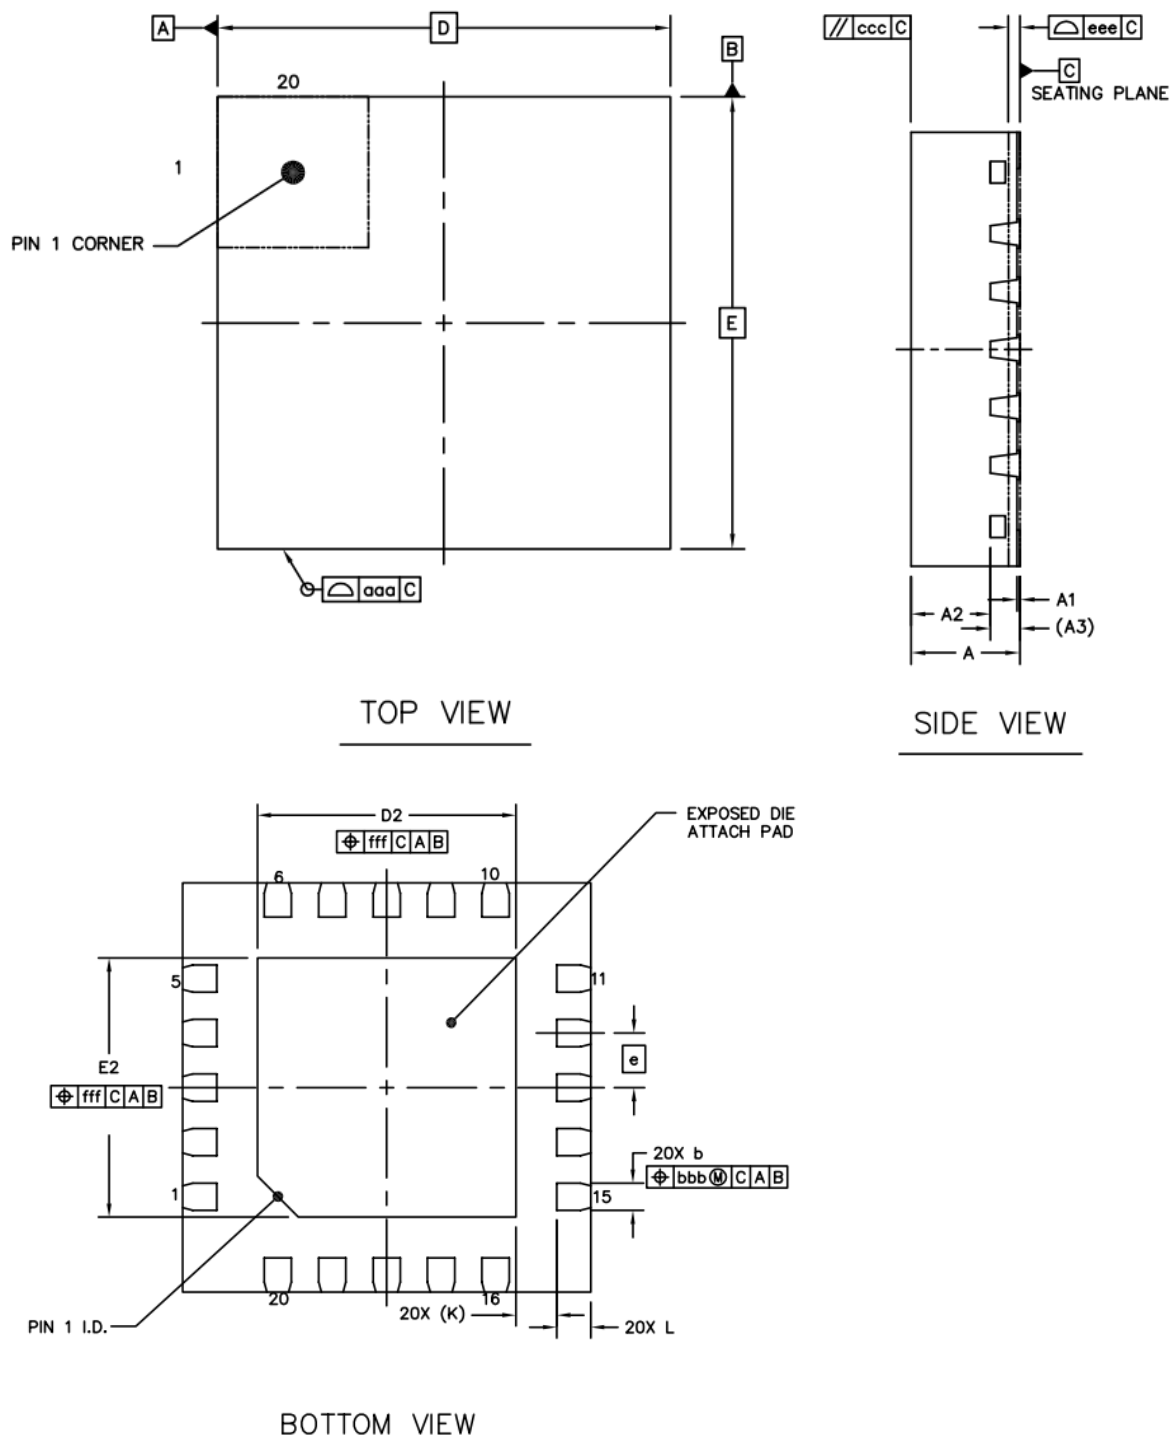

		SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS		A	0.7	0.75	0.8
STAND OFF		A1	0	0.02	0.05
MOLD THICKNESS		A2	---	0.55	---
L/F THICKNESS		A3	0.203 REF		
LEAD WIDTH		b	0.15	0.2	0.25
BODY SIZE	X	D	3 BSC		
	Y	E	3 BSC		
LEAD PITCH		e	0.4 BSC		
EP SIZE	X	D2	1.8	1.9	2
	Y	E2	1.8	1.9	2
LEAD LENGTH		L	0.15	0.25	0.35
LEAD TIP TO EXPOSED PAD EDGE		K	0.3 REF		
PACKAGE EDGE TOLERANCE		aaa	0.1		
MOLD FLATNESS		ccc	0.1		
COPLANARITY		eee	0.08		
LEAD OFFSET		bbb	0.07		
EXPOSED PAD OFFSET		fff	0.1		



Contact us

Address : 1301-1 Building A, Zhihui Square, No.4068 Qiaoxiang Road,
GaofaCommunity, Shahe Street, Nanshan District, Shenzhen, P.R.China

E-mail: info@bluetrum.com

Website: www.bluetrum.com